


DT-721 (AC Powered)

DT-725 (Internal Battery)

DT-721/725 KIT

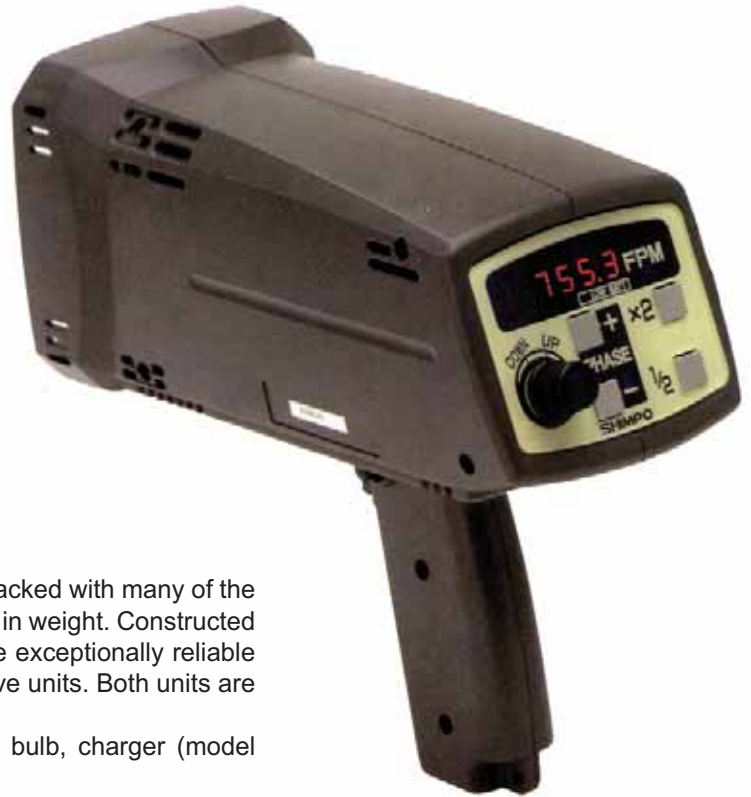

Economical lightweight, portable strobe light units packed with features.

The DT-721 and DT-725 web inspection strobe lights are packed with many of the same features as our famous DT-300 series, but are lighter in weight. Constructed of strengthened high impact plastic, these rugged units are exceptionally reliable and withstand the same harsh conditions as more expensive units. Both units are sold separately or as a convenient kit.

The DT-721 or DT-725 Kit contains a strobe, extra flash bulb, charger (model DT-only) and rugged carrying case.

SPECIFICATION

FLASHING RANGE	40.0 - 12,500 fpm (flashes per minute)
ACCURACY	+/- 0.02% of reading
RESOLUTION	0.1 fpm: 40.0 - 4,999.9 fpm / 0.2 fpm: 5,000 - 7,999.9 fpm / 0.5 fpm: 8,000 - 9,999.5 fpm / 1 fpm: 10,000 - 12,5000 fpm
PHASE SHIFT	+/- push buttons (360° in 6 seconds)
DISPLAY UPDATE TIME	Ext. mode : varies with flashing rate
OUTPUT SIGNAL	NPN open collector (24 VDC max., 50 mA), 150 µsec typical
RATE MULTIPLIER/DIVIDER	Multiply by 2, divide by 2
EXTERNAL TRIGGER INPUT SIGNAL	a) 12 - 24 VDC thru a 3-wire NPN output sensor (requires external power supply) b) 12 VDC thru a 2-wire proximity sensor (leakage current 1 mA max., load current 8 mA min.) c) Switch or relay contact
DISPLAY	5 digits, 0.3" (8 mm) high, LED
FLASH TUBE POWER/LIFE	Xenon, 10 W max. (100 million flashes)
FLASH DURATION	10 - 15 µsec
SENSOR POWER SUPPLY	None
LOW BATTERY INDICATOR	N/A / Flashing LED
BATTERY LIFE	1-2 hours depending on flash rate
POWER REQUIREMENT	115 VAC or 220 VAC ±10 % 60/50 Hz / Internal battery pack
OPERATING TEMPERATURE	32° - 104° F (0 - 40° C)
WEIGHT	1.5 lb (0.7 kg) / 2.75 lb (1.25 kg)
DIMENSIONS	8.98" L x 4.33" W x 8.54" H (228 mm x 110 mm x 217 mm), including handle

FEATURE:

- Plastic housing with strength members
- Lightweight design
- Phase shift (in degrees)
- Continuous duty flash bulb
- External trigger
- Slave functions
- Bright LED display
- Unique rotary pulse indicator
- Manual flash controller knob
- 1/4 x 20 mounting hole

DT-725KIT IN PADDED CASE WITH CHARGER, AND SPARE FLASH TUBE



AAA Press International, Inc.

3160 N. Kennicott Avenue ■ Arlington Heights, IL60004

<http://www.aaapress.com> ■ info@aaapress.com

US & CAN ■ Phone 800.678.7222 ■ Fax 800.678.7983

INT. ■ Phone 847.818.1100 ■ Fax 847.818.0071